

## Peak P-209X-S

## 4000kg 2 Post Base Plate Hoist





4 three-stages arms are suitable for a wide range of vehicles.


SPECI	FICATIONS
Capacity	4000KG
Max height	1940—2169mm
Min Height	90mm
Lifting Time (approx)	49 Sec
Weight	704kg
Power supply	230V 1PH
Total height	2841mm
Warranty	2 years

## FEATURES

- Only 100mm concrete thickness required (minimum)
- 4000kg (9,000lbs) capacity.
- Dual hydraulic chain-over cylinders manufactured to ANSI standard
- 4 three-stages arms are suitable for easy load of a large range of cars, vans & 4x4's
- 3/8" aircraft quality cable is used for balancing
- Single-point safety release, allow technician to disengage both column simultaneously.
- Self-lubricating UHMW Polyethylene sliders and bronze bushes.
- Base-Plate design, great for low roof or extra high top vehicles
- Automatically activated double safety locks built into each column .
- Screw up feet with 4x4 adapters
- Rubber door guards attached to each carriage
- Standard toe guards & 2 x tool trays on lifting arms.
- Low service costs
- European CE Safety Certified
- Full 2 year warranty












4 three-stages arms are suitable for more vehicles.



Self-lubricating bronze bush, no need frequently change.

Screw up feet & 2.5' 4x4 extensions

## AUTO EQUIPMENT BUILT TO PERFORM

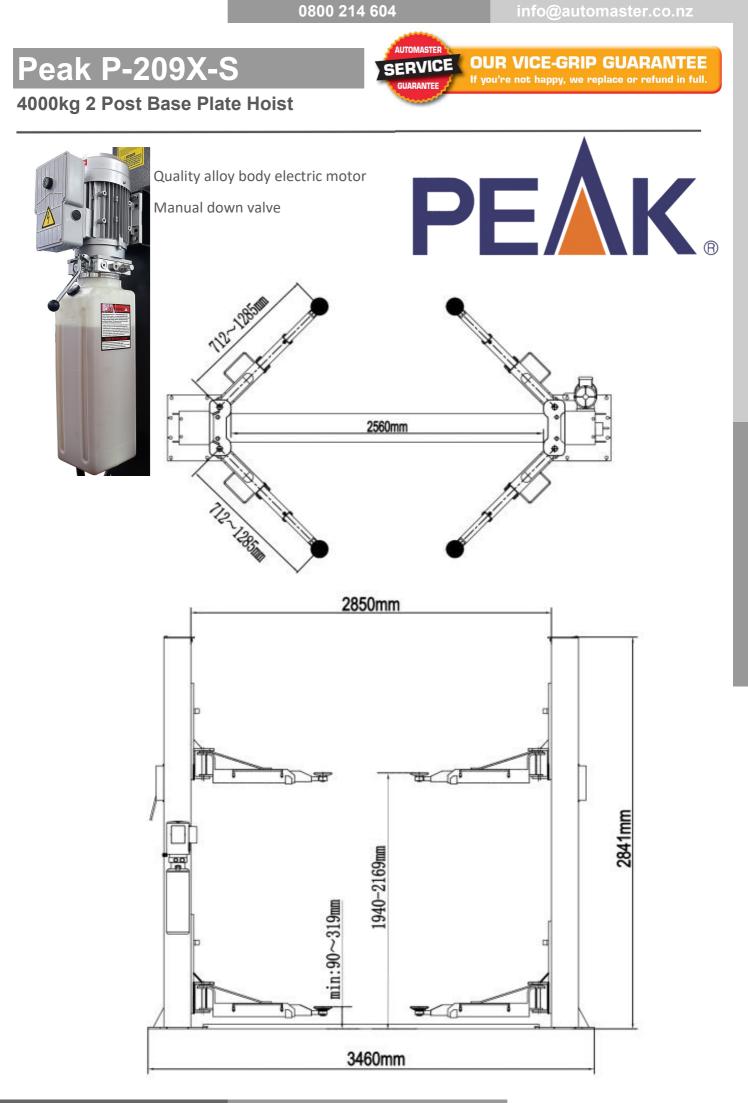

www.automaster.co.nz