POWERREX SL-5600A

4.5 Tonne Wheel Alignment **Scissor**


- Premium quality Korean made
- Standard with turntable recesses & rear slip
- 2 x centre jacking beams are also included permitting the operator to lift the wheels free of the platforms
- 4.5 tonne lift capacity
- Huge 1.85 metre lift height
- Space saving design
- Positive locking system
- Powder coat finish


SPECIFICA	ATIONS
Lifting capacity	4500kg
Lifting height	1850mm
Lifting time approx	45-55 sec
External dimensions	2150W x 6090L
Motor power	3ph







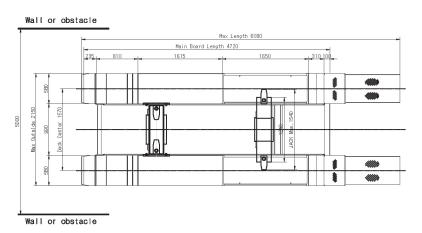

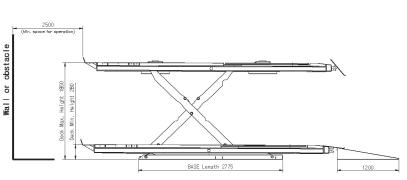

NO	DATE	REVISION & DESCRIPTION		SIGNATUR REVIEWED CHE		
MODEL NO.		SL-5600A (ONGROUND)				
MAX.CAPACITY		MATN	4,500 Kg			
		JACK	2,000 Kg			
MAX.LIFTING HEIGHT		MATN	1,850 mm			
		JACK	605 mm			
LOWEST HEIGHT		MATN	280 mm			
		JACK	275 mm			
SIZE (mm)			2,150W × 280H × 6	,090L		
LIFTING TIME		MATN	45 ~ 55 sec.			
		JACK	5 ~ 15 sec.			
LOWERING TIME		MATN	35 ~ 45 sec.			
		JACK	35 ~ 50 sec.			
POWER & MOTOR		Single	3HPx3Px220Vx50/60Hz			
		3phase	3HPx5Px380V/415Vx50/60Hz			
OPERAT I	ON METHOD		Control panel / Wired remote control type			

NOTE

- The installation ground must be horizontal
 The concrete thickness of ground must be at least 200mm
 Benty space between ground and lift must be filled with concrete after installation.

NO.	DESCRIPTION	WEIGHT OR SIZE		MATERIAL	0'TY	REMARK	
ANOTHER	APPROVED BY.	JooHyeong Lee.	TITLE.	TITLE.			
	CHECKED BY.	JH. L.		SL-5600A eel Alignment Lift			
	DESIGNED BY.	KK. L.	Whe				
	DATE.	2015.03.24.					
	SCALE.	1:N	©POWERREX KOREA				
	DVG NO.	PL-D04-02	₩P() W E K F	CEX K	JKEA	